

# Honda Pumps



**HONDA**



# GENUINE HONDA



**T**here are a lot of reasons to insist on Honda genuine pumps. That's because at the heart of every one of Honda's gas-powered portable pump models you'll find a legendary Honda four-stroke engine. As the world's largest engine manufacturer, Honda offers more engine experience than anyone. Experience born and tested on racetracks and roadways around the globe. Experience that continuously keeps us on the cutting edge. From automobiles, race cars, motorcycles and all-terrain vehicles to marine engines, general-purpose engines and power equipment products, Honda is committed to designing products that meet or exceed the demands of our customers across the board.

*(Pictured clockwise from above)  
Honda Advanced Robotics -  
Asimo, Honda FCX Clarity  
Hydrogen Fuel Cell Vehicle,  
Honda CBR, Honda Jet*

Throughout our history, Honda has been dedicated to technological and environmental innovation, and today is no different. After all, we have a legendary reputation to live up to. A reputation for unsurpassed quality, performance and reliability. A reputation worth considering the next time you're in the market for a pump.



## Legendary Honda Engines

Most Honda Pumps feature our Honda GX commercial-grade engines. These four-stroke engines have long been recognized as the industry leader in providing reliable, quiet and fuel-efficient power.

Features include overhead valves for smooth, consistent power, and a cast iron cylinder sleeve for "commercial-grade" quality and durability. Many offer a dual element air cleaner that provides a clean supply of air for increased engine life. Most Honda Pumps are also equipped with Oil Alert® that protects the engine by shutting it down if oil reaches an unacceptable operating level.

### Other features on the GX engine include:

- Easy starting thanks to Honda's auto-decompression technology.
- Electronic ignition for a "hotter" spark and more reliable ignition.
- Oversized muffler for quieter operation.
- Steel gas tank for added protection, including an internal fuel filter.
- Ball-bearing supported crankshaft for longer life and reduced vibration.



# Typical Honda Pump Applications

Type of Water	DE-WATERING			MULTI-PURPOSE	CONSTRUCTION		SUBMERSIBLE
	LIGHTWEIGHT	GENERAL PURPOSE	HIGH PRESSURE		TRASH	DIAPHRAGM	
	WX	WB	WH	WMP*	WT	WDP	ELECTRIC WSP
Clear Water***	✓	✓	✓	✓	✓	✓	✓
Slimy Water	✓	✓	✓	✓	✓	✓	✓
Muck Water	✓	✓	✓	✓	✓	✓	✓**
Silt Water		✓	✓	✓	✓	✓	✓
High Solid Content					✓	✓	✓**
Slow Seepage						✓	✓
Fast Seepage	✓	✓	✓	✓	✓		
Manholes		✓	✓	✓	✓	✓	✓
Cofferdams		✓	✓	✓	✓	✓	
Quarries		✓	✓	✓	✓	✓	
Septic Tank					✓	✓	
Industrial/Agriculture Chemical Dispersement*				✓			
Supply to:							
Mixer or Paver		✓	✓	✓	✓		
Concrete Curing		✓	✓	✓	✓		
Water Wagons***		✓	✓	✓	✓		
Sprinklers or Nozzle	✓		✓				

\* See owner's manual for specific approved chemical list.  
 \*\* WSP50AA and WSP100AA only  
 \*\*\* Non-potable only

Always use the Honda-supplied strainer.



## Tough, rugged, reliable. And they clean up nicely, too.

It all starts with the legendary Honda four-stroke engine because, let's face it, that's the heart of any pump. These engines have long been recognized as the industry leader in providing reliable, quiet and fuel-efficient power.

Why is Honda the world's largest manufacturer of engines?

**Reliability.** Our four-stroke technology absolutely sets the standard for reliability. That's precisely why rental shops and working professionals greatly prefer Honda equipment. There's virtually no downtime and they last longer than you can even imagine.

**Fuel Efficient and Quiet.** The fact that our four-strokes are exceptionally fuel efficient and quiet are two more attributes. On the job site, this counts for a lot.

**Easy to Start.** Honda is also easy to start and easy to use. All of our pumps and engines are perfectly matched and Honda-engineered for quality and precision.

All these reasons explain why Honda pumps are better. That's why we put together a line of 16 different portable pumps to cover almost any usage, from de-watering to multi-purpose, even submersible.

Check out the following pages to learn more about Honda pumps. You'll quickly see why Honda is the smart choice for you.

## Need more Information?

Visit our website for the very latest on Honda pumps and accessories, including product information and our convenient online dealer locator.

The Honda Power Equipment website includes a wealth of information on all Honda products.

Check out a variety of online resources to help you choose the Honda pump that's right for you or visit your nearest Honda Pump Dealer.

You can find the dealer nearest you by using our convenient online dealer-locator at [honda.com](http://honda.com).



*Now you can shop online for your new Honda Pump through your local authorized Honda Pump Dealer.*

SHOP ONLINE



## Honda's Exclusive Pump Select® Software

For an extremely helpful online, interactive guide that'll help you select which pump is best for your application, visit our website at [www.hondapowerequipment.com](http://www.hondapowerequipment.com). Enter information about your application and then let Pump Select® calculate your performance using different Honda pumps. Then pick the pump that best suits your needs.



# De-Watering Pumps

Honda de-watering pumps are designed for applications including irrigation, flood control, light construction, and swimming pool draining. Choose from an extensive selection of models with different features, pumping capacity and technical characteristics. With all these choices, there's no doubt you'll find one that fits your needs perfectly. Plus, every one of these pumps is compact, lightweight, and features something that professionals worldwide already count on – legendary Honda performance.




Honda's WX series pumps are an excellent choice for homeowners, gardeners and boat owners. Powered by Honda's easy-starting, quiet-running mini four-stroke engine, these models deliver exceptional performance in a truly lightweight package.




### WX10K1A

- Lightweight aluminum pump – weighs only 13.4 lbs.
- 37 gal/min capacity
- Includes garden hose adaptor, 16.5' suction hose, clamps and strainer
- Powerful, easy-starting, Honda mini four-stroke engine
- Uses regular gasoline – no mixing of oil and gas



### WX15AX2

- Lightweight aluminum pump – weighs only 20 lbs.
- 72 gal/min capacity
- Powerful, easy-starting, Honda mini four-stroke engine
- Protected by Honda Oil Alert®
- Hose clamps and strainer included



## GENERAL PURPOSE PUMPS



Honda's WB series pumps offer the best features at a value price. Featuring Honda's commercial-grade engine and rugged full frame protection with anti-vibration mounts, these pumps feature a fixed-mounted cast iron volute and impeller with a silicon carbide seal. This is the ultimate combination of features to provide unsurpassed performance and durability in the toughest conditions.



*WB series pumps feature Honda's reliable, easy-to-start, commercial-grade overhead valve engine, backed by world-renowned Honda technology.*

### WB Series Features




High-performance mounts minimize vibration.




**WB20XK2**

- Centrifugal, self-priming 2" pump
- 152 gal/min capacity
- Easy-starting, Honda OHV commercial-grade engine
- Silicon carbide mechanical seal
- Cast iron volute and impeller
- Heavy-duty full frame protection
- Isolation mounted engine and pump
- Protected by Honda Oil Alert®



**WB30XK2**

- Centrifugal, self-priming 3" pump
- 275 gal/min capacity
- Easy-starting, Honda OHV commercial-grade engine
- Silicon carbide mechanical seal
- Cast iron volute and impeller
- Heavy-duty full frame protection
- Isolation mounted engine and pump
- Protected by Honda Oil Alert®



Rigid-mount cast iron volute to reduce case wear.



Silicone-carbide mechanical seal for high durability.



The Honda WB20XK2 strainer is large and allows 8 mm (5/16 in.) solids to pass and helps prevent clogging.



Honda Oil Alert® protects the engine by shutting it down if the oil level becomes too low.



The WH series pumps offer high-pressure output, so they're perfect for high-pressure applications like using sprinklers or nozzles. High-pressure pumps are easy to start, extremely reliable and feature a powerful Honda four-stroke commercial-grade overhead valve engine offering superior torque and fuel efficiency.




*Thanks to the use of Honda four-stroke engines and superior technology, Honda water pumps offer smooth, quiet operation.*

**WH15XK1C1**



- High-pressure (55 psi max.), centrifugal, self-priming 1.5" pump
- 115 gal/min capacity
- Easy-starting Honda OHV commercial-grade engine
- Lightweight aluminum case
- Cast iron impeller & volute

- Easy-carry handle




**WH20XK1AC1**



- High-pressure (61 psi max.), centrifugal, self-priming 2" pump
- 134 gal/min capacity
- Easy-starting Honda OHV commercial-grade engine
- Lightweight aluminum case
- Cast iron impeller & volute

- Easy-carry handle





# Multi-Purpose Pump


This versatile pump is especially designed to pump various industrial and agricultural chemicals\* in addition to clear water applications. The WMP series pump features EPDM seals for chemical resistance, a reinforced thermoplastic pump housing and impeller, and full frame protection with vibration-damping mounts. This 2" pump features Honda's commercial-grade engine with Honda Oil Alert® to provide outstanding performance for chemical applications.

*\*See approved chemical applications on pump spec page.*



## WMP20XA

- Multi-purpose, centrifugal self-priming 2" pump
- 220 gal/min capacity
- Honda OHV commercial-grade engine
- Thermoplastic pump housing and EPDM seals for chemical capability
- Full frame protection
- Isolation mounted engine and pump
- Protected by Honda Oil Alert®



# Construction Pumps

The construction and rental businesses have relied on Honda pumps for over twenty years. Why? In a word, performance. They're so durable there's virtually no downtime, yet they're extremely long-lasting.

When it comes to value, what more could you ask for?

Well, how about full frame protection, Honda reliability and a complete selection of models

offering pumping capabilities up to 433 gallons per minute.

You get it all with Honda.



**H**onda Trash Pumps are specially designed for job sites and applications where high volume trash water capacity is required. Honda WT Series pumps offer highly desired features including our legendary, easy-starting and reliable OHV commercial-grade engine, rugged full frame protection, quick release clean-out and durable silicone carbide mechanical seals. Other Honda WT features include a unique conical impeller for improved priming and durability, replaceable stainless steel wear plate for extended life and a convenient multi-tool for on-site pump servicing and clean-out.



## WT Series Features



Convenient multi-tool for on-site pump servicing and clean-out.





Easy service access port.



**WT20XK3A**

- Heavy-duty 2" construction trash pump
- Easy-starting Honda OHV commercial-grade engine
- 187 gal/min capacity
- Solid handling capability up to 1<sup>3</sup>/<sub>16</sub>"
- Easy-to-use quick clean out port
- Easy-to-service impeller wear plate


- Standard strainer and service tool
- Protected by Honda Oil Alert®

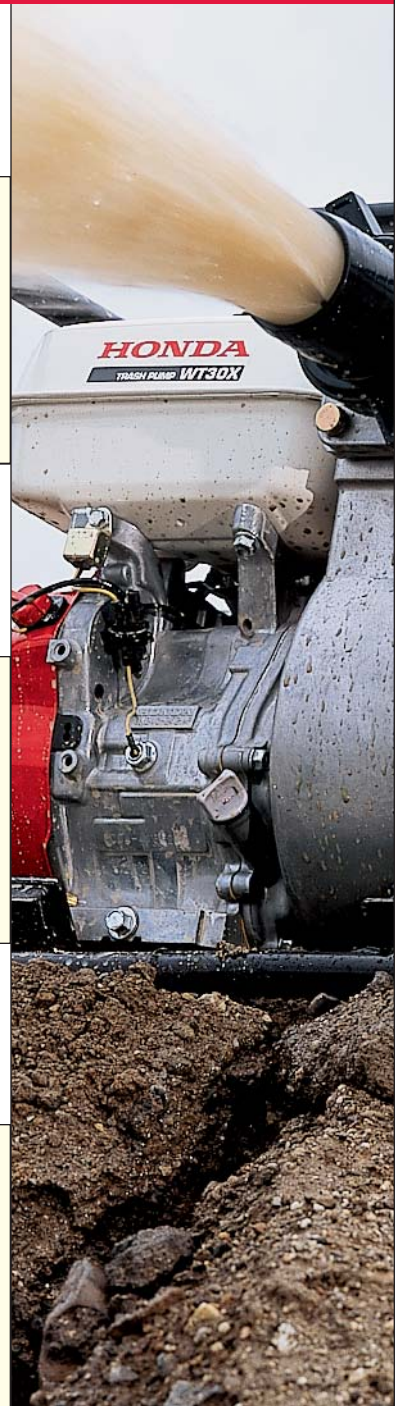

**WT30XK3A**

- Heavy-duty 3" construction trash pump
- Easy-starting Honda OHV commercial-grade engine
- Full frame protection
- 319 gal/min capacity
- Solid handling capability up to 1<sup>1</sup>/<sub>16</sub>"
- Easy-to-use quick clean out port
- Standard strainer and service tool


- Easy-to-service impeller wear plate
- Protected by Honda Oil Alert®



**WT40XK2A**

- Heavy-duty 4" construction trash pump
- Easy-starting Honda OHV commercial-grade engine
- Full frame protection
- 433 gal/min capacity
- Solid handling capability up to 1<sup>1</sup>/<sub>16</sub>"
- Easy-to-use quick clean out port
- Standard strainer and service tool

- Easy-to-service impeller wear plate
- Protected by Honda Oil Alert®



Silicone-carbide mechanical seal for high durability.



High-performance mounts minimize vibration.



Rugged full frame.



Conical impeller and stainless steel wear plate for superior performance.

## DIAPHRAGM PUMP




The Honda Diaphragm Pump is one of the most rugged and durable pump models available. The Honda self-priming, positive displacement diaphragm pump offers “run dry” capability and is ideally suited for muddy water, sludge or any water with a high percentage of solids. This pump offers an easy-starting, durable, Honda commercial-grade OHV engine. Superior performance and durability are the result of a unique combination of features including die cast aluminum case, air cushion chamber, special rock channel that allows solids to easily pass, spring-protected connecting rod to prevent case damage, rugged neoprene diaphragm with nylon insert and the ability to pass solids up to 2.4". With the standard wheel kit for easy transport, this pump offers an exceptional value for construction, water treatment and agricultural applications.



### WDP30XK1AT

- Dry, self-priming 3" diaphragm pump
- Easy-starting Honda OHV commercial-grade engine
- Pumps up to 80 gallons per minute
- Special “rock channel” prevents case damage
- Spring protected connecting rod
- Perfect when low volume, run dry operation is required
- Protected by Honda Oil Alert®
- Wheel kit standard

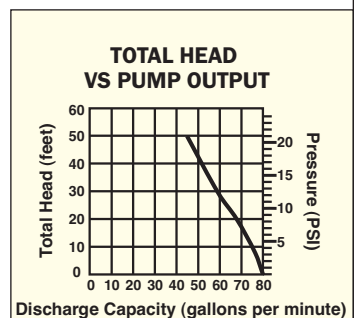

# Submersible Pumps


The submersible line of Honda pumps features high quality stainless steel casings, which means no rust or corrosion and a long life span. All five models are lightweight and offer truly automatic operation. They also feature built-in thermal resets to protect the pump from running dry. All five models feature a float switch, providing automatic starting for convenience. Honda offers top discharge and trash models to meet your application needs.

## SUBMERSIBLE WATER PUMPS




### WSP33K1AA

- 1/3 hp, 115V submersible pump
- 40 gal/min capacity
- Lightweight and durable stainless steel casing
- Automatic non-mercury float switch
- Built-in thermal reset switch
- 20' heavy-duty cord
- Single oil filled mechanical seal construction
- Garden hose adaptor included
- UL listed




### WSP53AA

- 1/2 hp, 115V submersible top discharge pump
- 70 gal/min capacity
- Automatic non-mercury float switch
- Lightweight and durable stainless steel impeller and case
- Rated for continuous duty use
- Double mechanical seal construction
- 50' heavy-duty cord
- UL listed

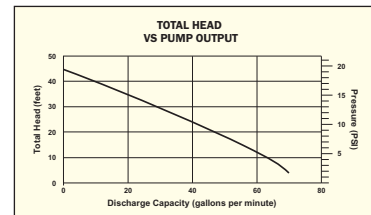


### WSP73AA

- 3/4 hp, 115V submersible top discharge pump
- 74 gal/min capacity
- Automatic non-mercury float switch
- Lightweight and durable stainless steel impeller and case
- Rated for continuous duty use
- Double mechanical seal construction
- 50' heavy-duty cord
- UL listed

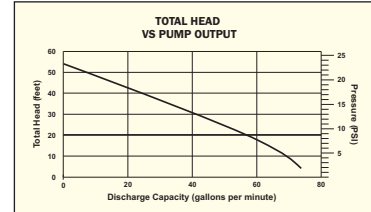


### WSP50AA

- 1/2 hp, 115V submersible trash pump
- 110 gal/min capacity
- Lightweight and durable stainless steel casing
- Automatic non-mercury float switch
- Built-in thermal reset switch
- 25' heavy-duty cord
- 2" solids handling
- Double mechanical seal



### WSP100AA

- 1 hp, 115V submersible trash pump
- 150 gal/min capacity
- Lightweight and durable stainless steel casing
- Automatic non-mercury float switch
- Built-in thermal reset switch
- 25' heavy-duty cord



# WATER PUMP SPECIFICATIONS

De-Watering					
		LIGHTWEIGHT		GENERAL PURPOSE	
Model	WX10K1A	WX15AX2	WB20XK2	WB30XK2	
Honda 4-stroke, single cylinder, air cooled engine	GX25 OHV	GXH50 OHV	GX120 OHV	GX160 OHV	
Displacement	25cc	49cc	118cc	163c	
Compression ratio	8.0:1	8.0:1	8.5:1	8.5:1	
Honda Oil Alert®	N/A	Std	Std	Std	
Pump type	Lightweight Centrifugal Self-priming	Lightweight Centrifugal Self-priming	General Purpose Centrifugal Self-priming	General Purpos Centrifugal Self-priming	
Volute	Aluminum	Aluminum	Rigid Mounted Cast Iron	Rigid Mounted Cast Iron	
Impeller	Aluminum	Aluminum	Cast Iron	Cast Iron	
Mechanical Seal (Pump case/impeller)	Carbon/Ceramic	Carbon/Ceramic	Silicone Carbide/Silicone Carbide	Silicone Carbide/Silicone Carbide	
Priming time	80 sec. at 16.4 ft.	120 sec. at 16.4 ft.	110 sec. at 16.4 ft.	150 sec. at 16.4 ft.	
Drive system	Direct	Direct	Direct	Direct	
Discharge capacity	37 gal/min	72 gal/min	152 gal/min	275 gal/min	
Suction port diameter	1.0" NPT	1.5" NPT	2" NPT	3" NPT	
Discharge port diameter	1.0" NPT	1.5" NPT	2" NPT	3" NPT	
Total head lift	118 ft.	125 ft.	92 ft.	85 ft.	
Suction head lift	26 ft.	26 ft.	26 ft.	26 ft.	
Maximum pressure	51 psi	54 psi	40 psi	37 psi	
Solids handling	N/A	N/A	N/A	N/A	
Dimensions (LxWxH)	12.8" x 8.7" x 11.8"	12.8" x 10.8" x 14.8"	17.9" x 14.4" x 16.5"	20.1" x 15.2" x 17.9"	
Dry weight	13.4 lbs.	19.8 lbs.	46 lbs.	60 lbs.	
3-Year Limited Residential and Commercial Warranty			●	●	

Construction					
TRASH			DIAPHRAGM		
Model	WT20XK3A	WT30XK3A	WT40XK2A	WDP30XK1AT	
Honda 4-stroke, single cylinder, air cooled engine	GX160 OHV	GX240 OHV	GX340 OHV	GX120 OHV	
Displacement	163cc	242cc	337cc	118cc	
Compression Ratio	8.5:1	8.2:1	8.0:1	8.5:1	
Honda Oil Alert®	STD	STD	STD	STD	
Pump type	Trash Centrifugal Self-priming	Trash Centrifugal Self-priming	Trash Centrifugal Self-priming	Diaphragm Self-priming	
Volute	Rigid Mounted Cast Iron w/ Stainless Wear Plate	Rigid Mounted Cast Iron w/ Stainless Wear Plate	Rigid Mounted Cast Iron w/ Stainless Wear Plate	N/A	
Impeller	Conical Cast Iron	Conical Cast Iron	Conical Cast Iron	N/A	
Mechanical seal (Pump case/impeller)	Silicone Carbide/Silicone Carbide	Silicone Carbide/Silicone Carbide	Silicone Carbide/Silicone Carbide	N/A	
Priming time	70 sec. at 16.4 ft.	100 sec. at 16.4 ft.	160 sec. at 16.4 ft.	20 sec. at 20.0 ft.	
Drive system	Direct	Direct	Direct	Direct	
Discharge capacity	187 gal/min	319 gal/min	433 gal/min	80 gal/min	
Suction port diameter	2" NPT	3" NPT	4" NPT	3" NPT	
Discharge port diameter	2" NPT	3" NPT	4" NPT	3" NPT	
Total head lift	98 ft.	89 ft.	85 ft.	50 ft.	
Suction head lift	26 ft.	26 ft.	26 ft.	24 ft.**	
Maximum pressure	42 psi	39 psi	37 psi	N/A	
Solids handling	13/16 inches	1 1/16 inches	1 1/16 inches	2.4"	
Dimensions (LxWxH)	24.4" x 18.1" x 18.3"	26.0" x 19.5" x 20.3"	28.9" x 21.1" x 22.2"	31.5" x 30.5" x 25.7"*	
Dry weight	104 lbs.	132 lbs.	172 lbs.	163 lbs.	
3-Year Limited Residential and Commercial Warranty	●	●	●	●	

\* With handlebar over engine \*\* 16 ft dry, 24 ft primed

# WATER PUMP SPECIFICATIONS

<b>De-Watering</b>		
<b>H I G H - P R E S S U R E</b>		
Model	<b>WH15XK1</b>	<b>WH20XK1A</b>
Honda 4-stroke, single cylinder, air cooled engine	<b>GX160 OHV</b>	<b>OHV</b>
Displacement	<b>118cc</b>	<b>163cc</b>
Compression ratio	<b>8.5:1</b>	<b>8.5:1</b>
Honda Oil Alert*	<b>NN/A</b>	<b>N/A</b>
Pump type	<b>High Pressure Centrifugal Self-priming</b>	<b>High Pressure Centrifugal Self-priming</b>
Volute	<b>Rigid Mounted Cast Iron</b>	<b>Rigid Mounted Cast Iron</b>
Impeller	<b>Cast Iron</b>	<b>Cast Iron</b>
Mechanical Seal (Pump case/impeller)	<b>Carbon/Ceramic</b>	<b>Carbon/Ceramic</b>
Priming time	<b>40 sec. at 16.4 ft.</b>	<b>60 sec. at 16.4 ft.</b>
Drive system	<b>Direct</b>	<b>Direct</b>
Discharge capacity	<b>115 gal/min</b>	<b>134 gal/min</b>
Suction port diameter	<b>1.5" NPT</b>	<b>2" NPT</b>
Discharge port diameter	<b>1.5" NPT</b>	<b>2" NPT</b>
Total head lift	<b>127 ft.</b>	<b>141 ft.</b>
Suction head lift	<b>26 ft.</b>	<b>26 ft.</b>
Maximum pressure	<b>55 psi</b>	<b>61 psi</b>
Solids handling	<b>N/A</b>	<b>N/A</b>
Dimensions (LxWxH)	<b>16.3" x 14.2" x 15.9"</b>	<b>16.7" x 14.8" x 15.9"</b>
Dry weight	<b>48.5 lbs.</b>	<b>51.8 lbs.</b>
3-Year Limited Residential and Commercial Warranty	<b>•</b>	<b>•</b>

# WATER PUMP SPECIFICATIONS

	<b>Multi-Purpose</b>
Model	WMP20XA
Honda 4-stroke, single cylinder, air cooled engine	GX160 OHV
Displacement	163cc
Compression Ratio	8.5:1
Honda Oil Alert®	STD
Pump type	Multi-Purpose Centrifugal Self-priming
Volute	Rigid Mounted Fiberglass Reinforced Polyester
Impeller	Fiberglass Reinforced Polyester
Mechanical seal (Pump case/impeller)	Carbon/Ceramic
Priming time	65 sec. at 16.4 ft.
Drive system	Direct
Discharge capacity	220 gal/min
Suction port diameter	2" NPT
Discharge port diameter	2" NPT
Total head lift	105 ft.
Suction head lift	26 ft.
Maximum pressure	45 psi
Solids handling	N/A
Dimensions (LxWxH)	20.5" x 15.7" x 17.7"
Dry weight	56 lbs.
3-Year Limited Residential and Commercial Warranty	•

## WMP20XA Approved Pumping Applications

### Industrial Chemicals

Acetic Acid, 20%	Nickel Sulfate
Aluminum Sulfate Ammonium Nitrate	Oleic Acid
Ammonium Sulfate	Phosphoric Acid, 0-80%
Barium Sulfate	Potassium Carbonate
Borax (Sodium Borate)	Potassium Chloride
Calcium Chloride*	Potassium Nitrate
Citric Acid	Potassium Sulfate
Copper Sulfate	Soaps (neutral)
Detergents (general)	Sodium Acetate
Ethylene Glycol	Sodium Bicarbonate
Fatty Acids	Sodium Bisulfate
Ferric Nitrate	Sodium Carbonate, 10%
Ferric Sulfate	Sodium Chlorate
Ferrous Sulfate	Sodium Chloride
Formaldehyde, 40%	Sodium Nitrate
Glycerine (Glycerol)	Sodium Sulfate
Lactic Acid	Stearic Acid
Lead Acetate	Sulfuric Acid, 0-29%
Magnesium Chloride	Tartaric Acid
Magnesium Nitrate	Vinegar
Magnesium Sulfate	Water (clear)
Maleic Acid	Water (salt)
Nickel Chloride	Zinc Sulfate

\* Temperature does not exceed 27 °C (80 °F).

### Agricultural Chemicals

Aatrex	Lasso
Amiben	URAN Solutions
Ammonium Thiosulfate	Modown
Avenge	N-Serve 24
Banvel	Phosphoric Acid Solutions
Basagran	Poly-N
Bicep	Ranger
Bladex	Round-Up
Dual	Sutan
Eradicane	Treflan
Extrazine	Vernam
Larsban	

- Do not use the WMP20XA for pumping liquids for human consumption.
- After each use, drain the pump housing into a suitable container and flush with fresh water.
- The temperature operating range of the pump is between -7 and 54 °C (20 and 130 °F).



# WATER PUMP SPECIFICATIONS

Submersible					
WSP33K1AA	WSP53AA	WSP73AA	WSP50AA	WSP100AA	Model
Submersible Standard	Submersible Standard	Submersible Standard	Submersible Trash pump	Submersible Trash pump	Pump Type
Automatic	Automatic	Automatic	Automatic	Automatic	Starting Type
Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Casing
1/3	1/2	3/4	1/2	1	Motor (HP)
115	115	115	115	115	Voltage
10	36	48	34	47	Starting amps
4	9	12.2	8.3	11.1	Running amps
Continuous	Continuous	Continuous	Continuous	Continuous	Duty
Class F	Class F	Class F	Class F	Class F	Motor insulation
Built-In Thermal Automatic Reset	Built-In Thermal Automatic Reset	Built-In Thermal Automatic Reset	Built-In Thermal Automatic Reset	Built-In Thermal Automatic Reset	Overheat protection
40 gal/min	70 gal/min	74 gal/min	110 gal/min	150 gal/min	Discharge capacity
25	44	54	32	42	Max. head (feet)
1.25 FNPT	1.5 FNPT †	1.5 FNPT †	2.0 FNPT	2.0 FNPT	Port diameter ( inches)
11 psi	19 psi	23 psi	14 psi	18 psi	Maximum psi
0.375"	0.375"	0.375"	2.0"	2.0"	Solids handling
Glass-filled Noryl	Stainless Steel	Stainless Steel	Single Channel Stainless Steel	Single Channel Stainless Steel	Impeller
Single Carbon Ceramic Upper/Rubber Lip Lower	Tandem Mechanical Carbon/Ceramic-upper SIC/SIC-lower	Tandem Mechanical Carbon/Ceramic-upper SIC/SIC-lower	Tandem Mechanical Carbon/Ceramic-upper SIC/SIC-lower	Tandem Mechanical Carbon/Ceramic-upper SIC/SIC-lower	Seals
20	50	50	25	25	Cord length (feet)
Heavy-Duty 115V	Heavy-Duty 115V	Heavy-Duty 115V	Heavy-Duty 115V	Heavy-Duty 115V	Cord type
6.4" x 10.3"	8.3" x 17.2"	8.3" x 17.2"	9.0" x 21.5"	9.0" x 22.8"	Dimensions (WxH)
6.4"	8.3"	8.3"	9.0"	9.0"	Pump diameter
11 lbs.	27 lbs.	27 lbs.	36 lbs.	41 lbs.	Dry weight (lbs.)
					† 2" adaptor included

## P U M P A C C E S S O R I E S



### BOXED PIN LUG HOSE KITS

INCLUDES 20' GREEN SUCTION, 50' BLUE DISCHARGE HOSE, 3/8" HOLE STEEL STRAINER  
COUPLED WITH MALE & FEMALE PIN LUG COUPLINGS

PUMP MODEL	PART NUMBER	DESCRIPTION
WX15	124015-1145-PINKT	1-1/2" PIN LUG SUCTION & DISCHARGE HOSE KIT
WB20X/WT20X/WMP20X/WDP20X	124020-1145-PINKT	2" PIN LUG SUCTION & DISCHARGE HOSE KIT
WB30X, WT30X, WDP30X	124030-1145-PINKT	3" PIN LUG SUCTION & DISCHARGE HOSE KIT
WT40X	124040-1145-PINKT	4" PIN LUG SUCTION & DISCHARGE HOSE KIT



### BOXED PIN LUG HOSE KITS (WH SERIES PUMPS)

INCLUDES 20' GREEN SUCTION, 50' BLUE DISCHARGE HOSE, NOZZLE, 1/8" HOLE STEEL STRAINER  
COUPLED WITH MALE & FEMALE PIN LUG COUPLINGS

PUMP MODEL	PART NUMBER	DESCRIPTION
WH15X (High Pressure)	124015H-1145-WHKT	1-1/2" PIN LUG SUCTION & DISCHARGE HOSE KIT
WH20X (High Pressure)	124020H-1145-WHKT	2" PIN LUG SUCTION & DISCHARGE HOSE KIT



### BOXED CAMLOCK HOSE KITS

INCLUDES 20' GREEN SUCTION, 50' BLUE DISCHARGE HOSE, 3/8" HOLE STEEL STRAINER  
COUPLED WITH CAMLOCK AND PIPE NIPPLE (INCLUDES MALE ADAPTERS)

PUMP MODEL	PART NUMBER	DESCRIPTION
WX15	124015-1145-CLKT	1-1/2" CAMLOCK SUCTION & DISCHARGE HOSE KIT
WB20X/WT20X/WMP20X/WDP20X	124020-1145-CLKT	2" CAMLOCK SUCTION & DISCHARGE HOSE KIT
WB30X, WT30X, WDP30X	124030-1145-CLKT	3" CAMLOCK SUCTION & DISCHARGE HOSE KIT
WT40X	124040-1145-CLKT	4" CAMLOCK SUCTION & DISCHARGE HOSE KIT



### GREEN PVC WATER SUCTION HOSE ASSEMBLIES WITH A RIGID PVC REINFORCEMENT — MADE IN THE USA SUCTION HOSE COUPLED MALE & FEMALE PIN LUG

PUMP MODEL	PART NUMBER	DESCRIPTION
WX15, WH15X	1240-1500-20H	1-1/2" X 20' GRN PVC, PIN LUG COUPLING
WB20X/WH20X/WT20X/WMP20X/WDP20X	1240-2000-20H	2" X 20' GRN PVC, PIN LUG COUPLING
WB30X, WT30X, WDP30X	1240-3000-20H	3" X 20' GRN PVC, PIN LUG COUPLING
WT40X	1240-4000-20H	4" X 20' GRN PVC, PIN LUG COUPLING



### SUCTION HOSE COUPLED CAMLOCK AND PIPE NIPPLE

PUMP MODEL	PART NUMBER	DESCRIPTION
WX15, WH15X	1240-1500-20CNH	1-1/2" X 20' GRN PVC, CAMLOCK AND PIPE NIPPLE
WB20X/WH20X/WT20X/WMP20X/WDP20X	1240-2000-20CNH	2" X 20' GRN PVC, CAMLOCK AND PIPE NIPPLE
WB30X, WT30X, WDP30X	1240-3000-20CNH	3" X 20' GRN PVC, CAMLOCK AND PIPE NIPPLE
WT40X	1240-4000-20CNH	4" X 20' GRN PVC, CAMLOCK AND PIPE NIPPLE



### BLUE GOODYEAR SPIRAFLEX DISCHARGE HOSE ASSEMBLIES DISCHARGE HOSE COUPLED MALE & FEMALE PIN LUG

PUMP MODEL	PART NUMBER	DESCRIPTION
WX15, WH15X	1145-1500-50H	1-1/2" X 50' BLUE 90 PSI DISCH'G, PIN LUG COUPLING
WB20X/WH20X/WT20X/WMP20X/WDP20X	1145-2000-50H	2" X 50' BLUE 80 PSI DISCH'G, PIN LUG COUPLING
WB30X, WT30X, WDP30X	1145-3000-50H	3" X 50' BLUE 55 PSI DISCH'G, PIN LUG COUPLING
WT40X	1145-4000-50H	4" X 50' BLUE 50 PSI DISCH'G, PIN LUG COUPLING



### DISCHARGE HOSE COUPLED CAMLOCK ASSEMBLIES

PUMP MODEL	PART NUMBER	DESCRIPTION
WX15, WH15X	1145-1500-50CEH	1-1/2" X 50' BLUE 90 PSI DISCH'G, (CAMLOCK)
WB20X/WH20X/WT20X/WMP20X/WDP20X	1145-2000-50CEH	2" X 50' BLUE 80 PSI DISCH'G, (CAMLOCK)
WB30X, WT30X, WDP30X	1145-3000-50CEH	3" X 50' BLUE 55 PSI DISCH'G, (CAMLOCK)
WT40X	1145-4000-50CEH	4" X 50' BLUE 50 PSI DISCH'G, (CAMLOCK)

To see our complete line of Water Pump Accessories visit us online at [www.hondapowerequipment.com](http://www.hondapowerequipment.com)

# HONDA™ P U M P S

Visit us at [www.pumps.honda.com](http://www.pumps.honda.com)

For optimum performance and safety we recommend you read the owner's manual before operating your Honda Power Equipment. Specifications subject to change without notice.

All images contained herein are either owned by American Honda Motor Co., Inc., or used under a valid license. It is a violation of federal law to reproduce these images without express written permission from American Honda Motor Co., Inc., or the individual copyright owner of such images. All rights reserved. HONDA, the HONDA PUMPS logo, Honda pump model names and their trade dress are trademarks of Honda Motor Co., Ltd. used under license from American Honda Motor Co., Inc. Many Honda engine, pump, and vehicle model names, and associated trade dress may be seen at [www.honda.com](http://www.honda.com). ©2010 American Honda Motor Co., Inc. C0466