



MX-150 Technical Specifications

MX 150

Includes: heater, secondary air regulator, oil by-pass regulator, pump assembly, primary waste oil strainer, check valve, barometric damper, oil supply strainer and thermostat.


FEATURES:

- UL Listed
- 150,000 BTU
- Fine grain galvanized (rust-resistant) cabinet
- MX Series High-Performance Burner
- Internal fan to reduce excess noise
- Adjustable, locking louvers
- Top, back, right or left exhuast options


Heat Range (btuh)*	to 150,000
Fuel Input (gph)	1.07
Heating Area (sq. ft.)**	to 5,000
Power Supply (AC)	120V.60HZ
Cabinet Dimensions (H x W x L)	24" x 40.5" x 46.75"
Hanging Weight (lbs.)	413
Axial fan (cfm)	2,400
Chimney Pipe***	6" Class "A"
Compressed Air****	2 CFM - 15 PSI
Combustion Chamber	12 GA CRS
Chimney Location	Top / Left Side
Warranty (Parts/Chamber)	1 year / 10 year

^{*} BTUH value varies with fuel type


**** Customer supplied

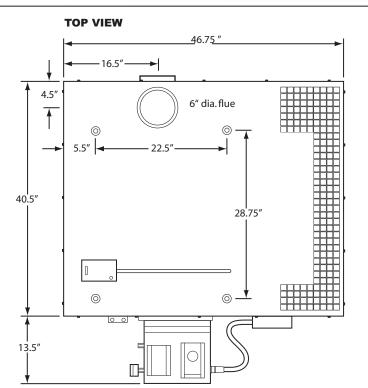

RIGHT SIDE

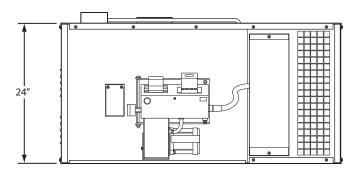

LEFT SIDE

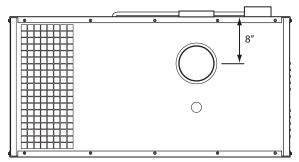


^{**} The suggested heating area is based on buildings with minimal heat loss due to open doors, construction, materials, windows, insulation, etc...

^{***} Chimney package is optional



Value Package A


Thru-Roof Installation

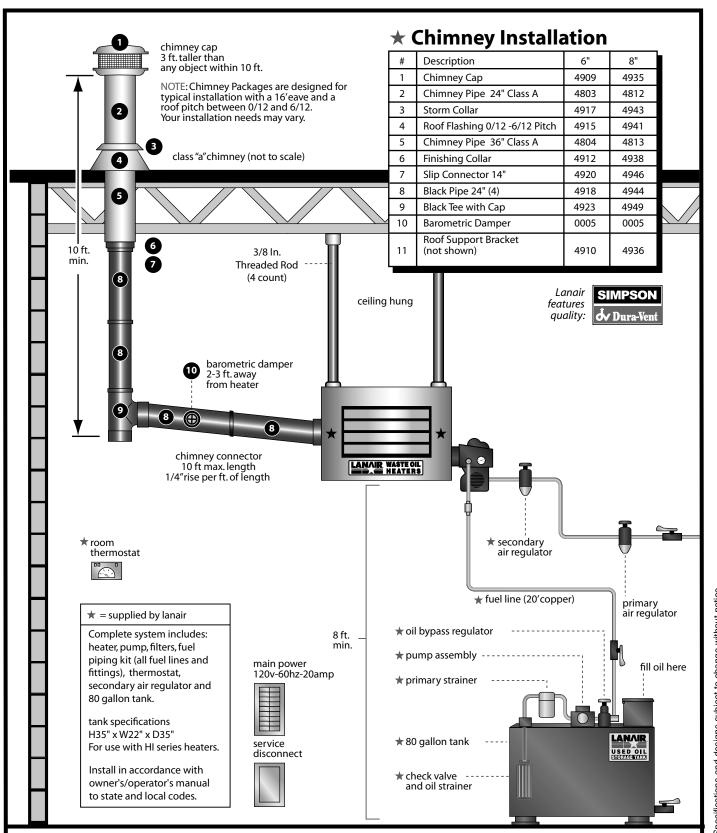



Value Package B


Thru-Wall Installation

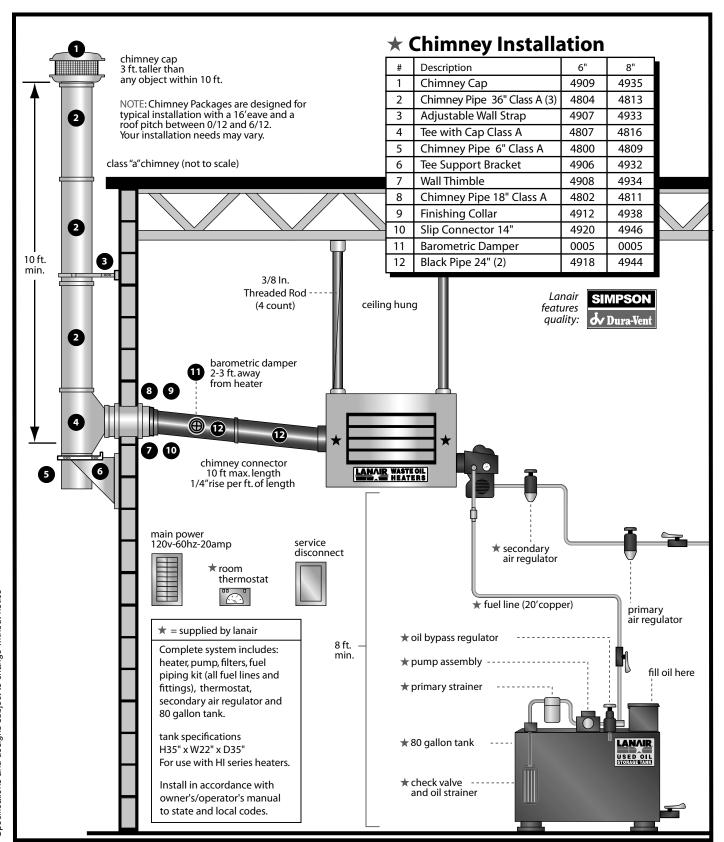

Value Package C

Thru-Roof Installation



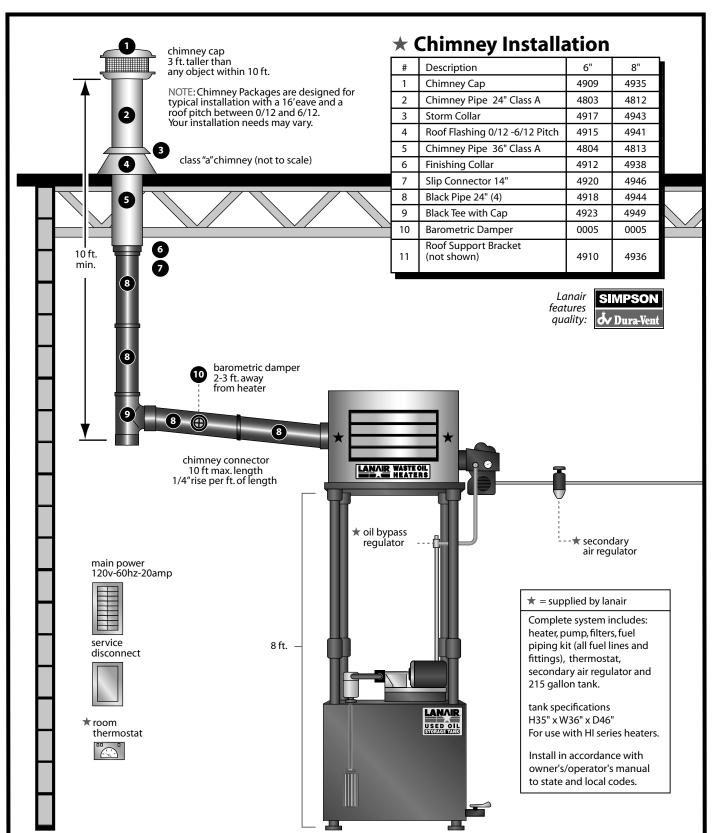

Value Package D

Thru-Wall Installation



