

ADVANCED : ETERNAL HYBRID™ SYSTEM

ENGINEERED TO OUT-PERFORM ALL OTHER WATER HEATERS ON THE MARKET.

Eternal hybrid is the only water heating system that combines the best of tank and tankless features in one. The patented, powerful design is engineered to replace multiple tanks, use less energy and space than one tank and produce endless hot water for multiple applications at once.

- » Maintains 86% efficiency
- » Built-in reservoir eliminates cold water sandwich and allows you to build a recirculation system with no external electric tank
- » Low exhaust temperature allows Eternal to be PVC vented for easier and more economical installs
- » Near zero greenhouse gas emissions means Eternal is one of the cleanest burning appliances on the market
- » Stainless steel reservoir is self cleaning, maintenance free and backed with a 20 year no-leak warranty on stainless steel heat exchanger tank for residential, 10 year warranty for commercial
- » Limited 3 year warranty on all other parts
- » 1 year warranty on reasonable labor



Eternal hybrid works on-demand and uses a state-of-the-art modulating infrared burner that is triggered by water-flow or thermostat. This premium stainless steel burner is a key to Eternal hybrid's precise, safe and clean performance

The advanced multi-pass heat exchanger drives heat downward then recycles it through 44 baffled pipes for maximum efficiency

Water fills the reservoir from bottom up and spreads evenly around the 44 heating pipes; producing endless hot water with consistent pressure and temperature



* PV model shown


Visit www.eternalwaterheater.com, call 1-866-946-1096, or e-mail eternalsales@grandhall.com

eternal

PRODUCT SPECIFICATIONS

		ETERNAL GU32	ETERNAL GU28	ETERNAL GU26	ETERNAL GU20	ETERNAL GU32DV	ETERNAL GU28DV	ETERNAL GU26DV	ETERNAL GU20DV
THERMAL EFFICIENCY		86%							
INSTALLATION		Indoor/Outdoor (outdoor kit req., sold separately)				Indoor Only			
FLUE SYSTEM		Forced Exhaust Power Vent				Sealed Combustion Direct Vent			
CONNECTION REQUIREMENTS	GAS	3/4" Female							
	WATER	3/4" Female, 15 to 150 Psi							
	VENT	4" Schedule 40 PVC, CPVC or ABS							
	ELECTRICITY	120VAC (60 Hz) 0.7A. Includes 5' cord with standard 3-prong connector, Standby - 8 watts, Maximum - 105 watts							
GAS TYPE		Pre-set for NG / LP conversion kit sold separately				Pre-set for NG / LP conversion kit included			
MAXIMUM / MINIMUM GAS RATE (INPUT BTU'S)		236,000 / 47,500	199,000 / 47,500	180,000 / 47,500	145,000 / 47,500	236,000 / 47,500	199,000 / 47,500	180,000 / 47,500	145,000 / 47,500
RESERVE TANK SIZE (GAL)		6.4		3.8		6.4		3.8	
GAS PRESSURE REQUIREMENT		NG: 3.5" – 10.5" W.C. LP: 8" – 14" W.C.							
GPM CAPACITY RANGE		0.1 – 20.8	0.1 – 17.5	0.1 – 15.8	0.1 – 12.8	0.1 – 20.8	0.1 – 17.5	0.1 – 15.8	0.1 – 12.8
IGNITION SYSTEM		Electronic Direct Ignition							
TEMPERATURE RANGE		100 – 167 in 15 steps							
UNIT WEIGHT (LBS)		172.9		145.6		180.2		151.8	
DIMENSION (HXWXD)		40.9" x 17.3"x 22.8"		33.5" x 17.3" x 22.8"		40.9" x 17.3"x 22.8"		33.5" x 17.3" x 22.8"	

ETERNAL HOT WATER FLOW RATE DATA

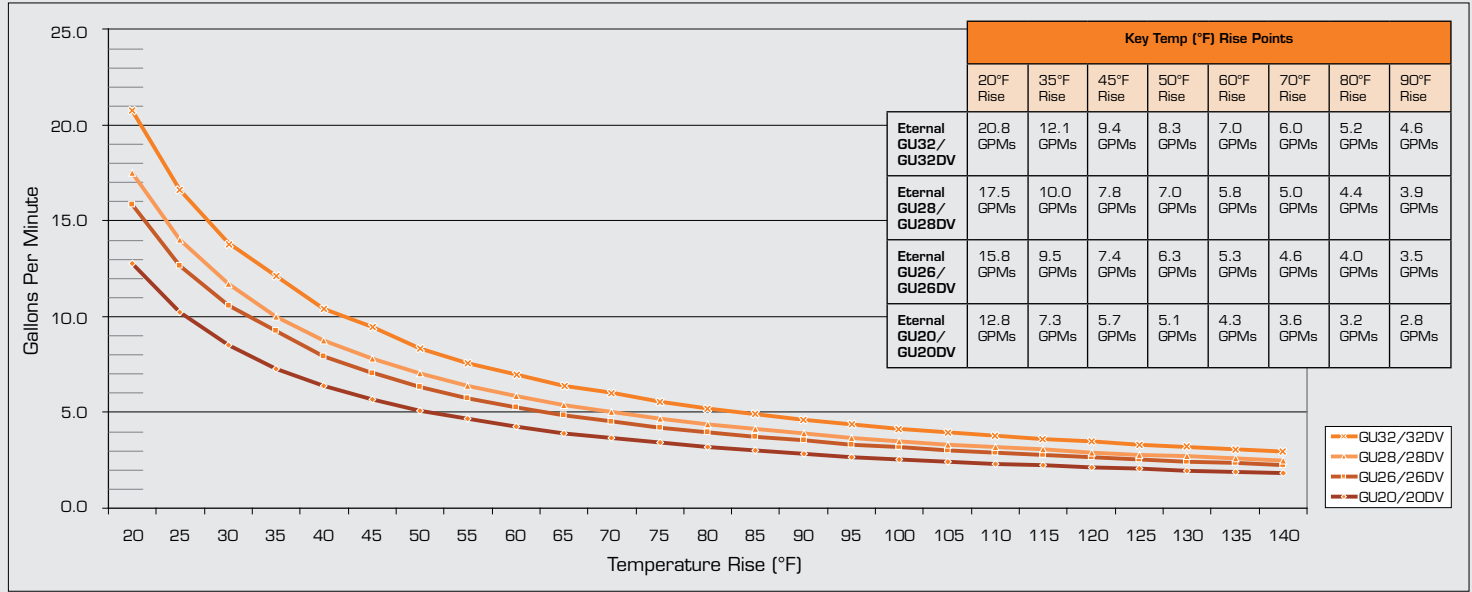

ETERNAL CERTIFICATIONS & INDUSTRY ASSOCIATIONS



US Patent No 6,945,197 / © 2009 Grand Hall · In the interest of product development, Eternal product designs, features and specifications are subject to change without notice.
Grand Hall USA, Inc. · 3838 W. Miller Road · Garland, Texas, 75041 · Tel: 1-866-946-1096 · Fax: 972-279-8440 · Email: eternalsales@grandhall.com · www.eternalwaterheater.com

